





大羽工業(香港)有限公司 TTY INDUSTRIAL(HK)CO.,LTD.





服務**人** 400—848—0606

€ Http://www.dayu.com.cn

☑ E-mail:dayu@dayu.com.cn



TTY

About Us 公司簡介

旭豪機械有限公司位于安徽省池州市經濟開發區金安工業園,是一家專業 從事工業縫制設備研發、生産的企業,擁有一套完整的管理體系和先進的質 量檢測儀器及精密的加工設備,具有獨立開發産品的能力。

本公司生産的TTY-大羽工業縫紉機投入市場以來,憑着優良的質量和 完善服務已贏得了廣大客户的信賴。公司在全國各地已相續成立了服務中 心,使旭豪機械成爲工業縫紉機界的一顆新星。

公司信息管理中心廣泛收集客户的意見及建議,并將信息及時反饋到質 檢部門、生產部門,而使產品質量得到進一步的改進。正因爲這樣才能使我 公司在市場竞争中擁有旺盛的生命力。

Chizhou Xuhao machinery Co.,Ltd is an synthetical enterprise ,comprising factory and trade department, we are a professional manufacturer specialized in producing all kinds of sewing machine for shoes, hats, bags, sport producits, leather furniture etc. We have the whole process of producing, supply, sale and services, we a complete management system, advanced inspection instruments for quality and precession manufacturing equipments. Which enable us to have the capability for developing products independently.

Since being put into the market,our TTY brand sewing machine has gained many customers and their trusts with it's excellent quality,consummate technology and complete set of beforesale, onsale, aftersale services, we have established market and service network for development, technology support all over the world, make XUHAO MACHINERY CO. LTD A superstar in Industrial sewing machine field based on that.

We collect the comments and suggestions from our customers broadly throughout our Managemer center of informationand give feedbacks to the Development Department, QA Departments production department and other correlative department in time to further improve and complete the quality of our products, Just because of this our company always has the prosperous vitality in the market competition.





TTY



企業使命: 創造民族知名品牌、爲客户提供最高價值。

企業理念: 敬業、認真、嚴謹、奉獻

企業願景: 在制鞋縫制設備領域, 成爲一家最專業的標杆性企業。

Enterprise Mission: Creating national famous brand and providing high value products.

Enterprise Philosophy: Dedicated 、 Seriously 、 Rigorous 、 Dedication

Enterprise Vision: To be a most professional surveyor's pole enterprise in shoe-making and sewing equipments.

Enterprise culture

企業文化

Dedicated /敬業

敬業:是一個道德的範疇,是一個對自己所從事的工作負責的態度,道德就是人們在不同 的集體中,爲了我們集體的利益而約定俗成的,應該做什麽和不應該做什麽的行業規範。 所以敬業就是人們在集體的工作中,嚴格遵守職業道德的工作態度。

Dedication is a moral category, is engaged in one of their own work and responsible attitude, the moral is that people in different collective, for the benefit of our collective and common law, should do and should not do the industry norm. So dedicated is that people in the collective work, strict adherence to ethical attitude.

Seriously/認真

認真:認真的你我,總是在生活中隱隱發光;認真的態度,總讓工作的問題迎刃而解;我 們提倡實實在在做人、踏踏實實做事,并以此作爲衡量人才品質的一個標準。

Seriously, seriously you and me, always in life the faint light; seriously, always make work solved the problem; we advocate real life, working sense, and thus as a standard measure of the quality of personnel.

Rigorous /嚴諂

嚴謹: 對工作如履薄冰,絶不心存僥幸; 對崗位任務注重細節,絶不粗枝大葉; 對工作標 準嚴格遵循,絶不投機取巧; 對産品質量一絲不苟,絶不以次充好。

It is a rigorous work attitude, for safe production in perpetuity, not luck; attention to detail on the job tasks, not sloppy; follow strict standards for work, not opportunistic; meticulous product quality, never cold charged.

Dedication /奉獻

奉獻:是一種行動,也是一種信念,常懷奉獻之心的人真正懂得人生的快樂,心擁奉獻之 念的人真正懂得人生的真諦,而奉獻精神更是一種力量。

Giving is an action, is also a belief, Huaikang dedication of people who truly understand the heart of a happy life, the heart of the concept of the person pro dedication truly understand the meaning of life, and dedication is a force.



- TTY-91218/91219 單/雙針數控智能型羅拉車
- 02 TTY-9922/9923 單雙針高速直驅羅拉車(一體機)
- 03 TTY-591/592 單/雙針高速羅拉車
- 1 TTY-9618-1/9619-1 上下輸送三自助羅拉車
- Full automatic drive roter post bed sewing machine with top and bottom f
- 上下輸送細柱三自動羅拉車 Full automatic drive roter slim post bad sewing machine with top and bottom feed
- TTY-9910BFT/9920BFT 三自動羅拉車
- TTY-9910/9920 單/使計高速立柱式羅拉車 Single-belt locketth heav duy sewing mechine With wheel feed needs feed and o
- TTY-9910H/9920H 單/雙針高速立柱式羅拉車(適用于粗綫車縫) Snglekbutile needle post-bed lockstron nearly duty sewing machine
- TTY-492A.B/498A.B/499A.B 網 低炉隙 開放車 medical baselindsdehichters-had review in internal
- TTY-851/852 單/雙針平板羅拉車 Sngle/double needle flatbod lockstitch se
- 109 TTY-810/820 單/雙針立柱式高頭車 Srglektouble needle post bed lockstitch sewing machi
- TTY-810H/820H 單/雙針送高頭車 Snakstouble reacte cost-bad bar feed seving machine
- TTY-810H-BT/820H-BT 單/雙針針送高頭車
- TTY-810BT/820BT
 單/雙針直驅高頭車
 Singledouble needle post-bed needle ber feed sev/ng machin
- TTY-513A 單針綜合送料平缝機 Single needle compound feed lock-stitch sewing machin
- TTY-652 人字型維紉機 Lockstitch zigzag sewing machine
- 12 TTY-1126/1136/1146 曲質人字車 High-speed stud oler bending arm zigzag sewing machine
- 13 TTY-1452/2452 高柱式人字車
- TTY-435 简型人字車 Cylnoler-bed zigzag sawing mac

- TTY-105 粗綫人字車 Heavy-outy zigzag sewing me
- 14 TTY-1530/2530 單/雙壓脚人定平車(大梭、自動加油)
- 15 TTY-2971 補鞋機
- 15 TTY-335A/335B 高速單針綜合送料橫筒型縫紉機
- 116 TTY-335-8BL
- 16 TTY-345
 全自動高速對综合送料橫筒型縫紉機
- 17 TTY-201 内裏修遺機
- 17 TTY-202 大底/内裏修邊機
- 18 TTY-203 内裏、成型後後邊機
- TTY-206 雙色大底、内裹修邊機
- 19 TTY-209 雙色大底修邊機
- TTY-802A
- TTY-801Z 重力型削皮機(上下、輪滚動送料) Skylng mischineffeed dog with upper roller & lower wit
- 21 TTY-204 雙針摩卡車(適用于極厚料)
- TTY-205A/B 單針屋脚上下送筒型車(摩卡車適用于極厚料可選配打皴器) Snde neede mocrosin sewim machina a droke had usakan kada wata ta
- 22 TTY-450 自動加油中底縫合材
- 22 TTY-600 自動加油中底縫合機
- 23 TTY-0305 三針五鏡鏡刻機 Troce_perfect has fine through so.

- 23 TTY-0406 四針六綫網縫機
- 24 TTY-0406H
- 77 TTY-3811B
- 25 TTY-373/474/575 超高速包維機(拷克車) (三綫/四綫/五綫
- 25 TTY-38L 貝形飾邊包縫機(貝殼車
- 26 TTY-168 雙線座式内綫機
- 26 TTY-168S 雙線壓式內線機 Double lineads lock sitch sedaed type shoe-border stitcheriameli l
- TTY-169 雙綫座式內綫機 Double threads look stitch seat
- TTY-268 雙線座式內綫機 Du the threads look stitch seated type shoe-border
- TTY-268A 雙綫座式內綫機 Double threads lock stitch seated type shoe-border stitche
- 29 TTY-183 維馬克機 Sewing machine for mocco
- 29 TTY-185 維外緩機 Sole stitching machine
- TTY-182HS 曲臂花樣機 Crankshaft tricks machine
- 31 TTY-181HS 單/雙針粗綾電子花樣機
- 32 TTY-1900HS 電子花樣機 Computerised pattern serving machin
- TTY-311G/326G/342G/6040G 電子花様機
- 33 TTY-787 智能型折邊機
- TTY-757A/B 自動上膠折邊機(電子馬達) Thermo-cementing edge folder machine with the new system/Electro
- TTY-747A/B 自動上膠折邊機(電子馬達/普通馬達) Thermo-cementing edge folds machine(747A Bectronic motor /747B General mot
- 35 TTY-608D 自動上膠分邊錘平機
- 35 TTY-608A 自動上膠分邊鍾平機
- TTY-608C 自動上股分邊籍平機 Automatic glue-coaling side-separati

- 36 TTY-302 熱熔膠塗布機
- 37 TTY-303 熱熔膠上樹膠
- TTY-312 拉鏈四面上膠機
- 38 TTY-306 熱熔膠點膠機
- 38 TTY-307 硬輸强力上膨機
- 39 TTY-305 水性喷膠機 Water-based adhesive screwnon
- 39 TTY-313 上腳上糊機
- TTY-25H 氣動分邊壓條機 Side secenting pressure mach
- TTY-25HZ 曲臂氣動分邊壓條機 Side separating pressure machine
- TTY-25 後跟壓係機 Seam opening & tape attaching mach
- 41 TTY-006 半自動打釘機
- 42 TTY-007 全自動打釘機 Fully automatic snap tastering mac
- 472 TTY-160A 電腦切帶機
- 43 TTY-170A 全自動多角度切帶機
- 43 TTY-180A 智能型多角度切帶機
- 4.4 TTY-801HZ 帶刀片皮機(鎌皮機)
- 44 TTY-301 内孔修邊機
- TTY-309 翰盤式多功能贴合機
- 45 TTY-310 立式錘平機
- 4.6 TTY-311 桌上式捶平機
- TTY-805 削泡棉機



TTY-91218/91219 單/雙針數控智能型羅拉車 Singleidouble needle CINC intelligentized post bed sewing machine



					91218BFT 91219BFT	
	O IL IOC	ULLIUI				O IL IO
	2500	2500	2500	2500	2500	2500
NUMBER OF STREET	15	15	15	15	15	15
	7/5	7/5	7/5	7/5	7/5	7/5
	41	41	41	41	41	41
	標準釜	標準從	標準釜	標準釜	標準釜	大签
	DPx5 (#9~#21)	DPv6 (#9~#21)	DPx5 (#9~#21)	DPx5 (#9~#21)	DPx5 (#9-#21)	DPs5 (#9~#21
X		0	٠			
					0	
					0	
					10	

特點及用途

TTY - 91218/91219 BFT

B自動倒縫

F 自動抬壓脚 Automatic presser

自動切线

TTY-91218

單針數控智能型羅拉車(針送&上下同步輸送)

TTY-91219

雙針數控智能型羅拉車(上下同步輸送)

特點及用途


公司品牌 company brand

- >該機型系列高速縫紉機,用于制鞋業。
- >特别適用于縫制高檔皮革、包袋、手套、帽子等弧形中厚料物品。

産品型號 product code

- > 數字化控制,任何環境可實現針距一致。
- >任何時候重針100%,自由設定差動送料。
- > 采用伺服直驅電機, 節能環保。
- > 該機型完全采用電子控制,無需壓縮空氣。
- > 采用過載離合器,用于放梭保護。
- > 所有裝飾縫或功能縫綫,均能達到最高質量。
- > 針孔相對的倒缝,不會一刺破面料。
- > 控制面板調校, 倒缝, 針數簡單容易。

- > This machine post-bed high-speed seamer for shoe manufacturing,
- > It is especially available for sewing on medium heavy weight articles with arcshaped, such as superior leather shoes, hand bags, gloves, caps, you etc,
- > Digital control, the stitch length is same in any environment
- > Guaranteed "stitch in stitch" backtacking -no "perforation" of material, active differential feed
- > It ensures you easy daily maintenance.
- > No compressed air required, all electronic control.
- > Easily adjustable thread trimmer for short thread ends.
- > Over load clutch for hook protection.
- > Top-quality for all decorative and securing seams.
- > Stitch in stitch "backtacking-no "perforation" of material.
- > Simple adjustment to number of backtack stitches via control panel.

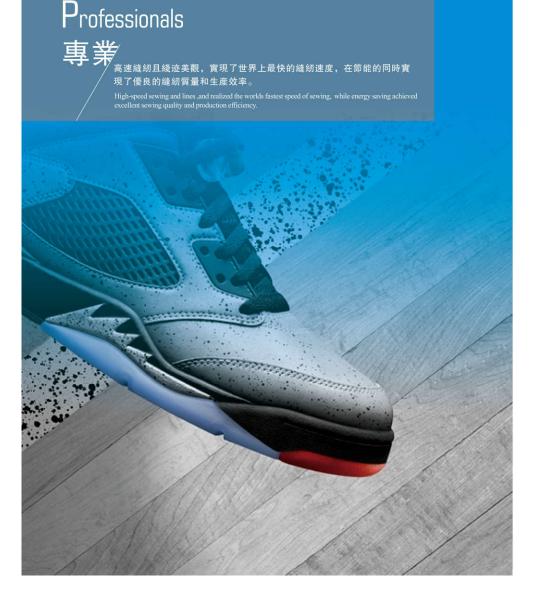

TTY-9922/9923

單/雙針高速直驅羅拉車(一體機)



				٠			0
H." navota				•			•
			•				
X		0		0			
	DPx5 (#9~#21)	DPx5 (#9~#21)	DPx5 (#9~#21)	DPx5 (#9~#21)	DPx5 (#9~#21)	DPx6 (#9~#21)	DPx5 (#9~#21)
	標準釜	標準釜	標準能	標準釜	標準釜	大釜 Large Pools	標準能
	41	41	41	41	41	41	41
	7/5	7/5	7/5	7/5	7/5	7/5	7/5
PARK THE PAR	15	15	15	15	15	15	15
	2500	2500	2500	2500	2500	2500	2500
	9922B 9923B	9922T 9923T	9922FT 9923FT	9922BT 9923BT	9922BFT 9923BFT	9922LT 9923LT	9922-1BF 9923-1BF

特點及用途

TTY - 9922/9923 BFT

B 自動倒缝

F 自動抬壓脚 Automatic presser

1 自動切綫

TTY-9922-1

單針高速羅拉車(針送&上下同步倒針輪送)

TTY-9923-1

雙針高速羅拉車(上下同步倒針輸送)

特點及用途

公司品牌

- >該機型系列高速縫紉機,用于制鞋業。
- >特别適用于縫制高檔皮革、包袋、手套、帽子等弧形中厚料物品。

産品型號 product code

- >采用伺服直驅電機,節能環保。
- >該機型完全采用電子控制,無需壓縮空氣。
- >采用過載離合器,用于放梭保護。
- > 可方便和精確調節的機針檔板。
- > 有預編程功能的多功能開闢內置在機頭中。
- > 倒縫/間歇鎖定 預設速度的選擇

SPECIAL FEATURES AND APPLICATIONS

- > This machine post-bed high-speed seamer for shoe manufacturing,
- > It is especially available for sewing on medium heavy weight articles with arcshaped, such as superior leather shoes, hand bags, gloves, caps, you etc,
- > It ensures you easy daily maintenance.
- > No compressed air required, all electronic control.
- > Easily adjustable thread trimmer for short thread ends.
- > Over load clutch for hook protection.
- > Easily and accurately adjustable needle guard.
- > A multifunction switch with pre-programmed functions is integrated in the
- > Reverse sewing, intermediate backtacking, Selection of pre-set speed.

TTY-591/592

單/雙針高速羅拉車



			٠		•	
X		•	۰	0	٠	
	DPx6 (#9~#21)	DPx5 (#9~#21)	DPx5 (#9~#21)	DPx5 (#9~#21)	DPx5 (#9~#21)	DPx5 (#9~#2
	標準釜 sterilet Nos	標準釜	標準釜	標準能 standard book	標準釜	大釜
	41	41	41	41	41	41
	7/5	7/5	7/5	7/5	7/5	7/5
	15	15	15	15	15	15
	2500	2500	2500	2500	2500	2500
	Charles Control	591T 592T			591BFT 592BFT	

特點及用途

TTY - 591/592 BFT

B自動倒缝

F自動抬壓脚

公司品牌

産品型號

TTY-591

單針高速羅拉車(針送&上下輸送)

TTY-592

雙針高速羅拉車(上下輸送)

特點及用途

- > 該機型系列高速缝紉機,用于制鞋業。
- > 特别適用于缝制高檔皮革、包袋、手套、帽子等弧形中厚料物品。
- > 采用伺服直驅電機, 節能環保。
- > 該機型完全采用電子控制,無需壓縮空氣。
- > 采用過載離合器,用于放梭保護。
- > 可方便和精確調節的機針檔板。
- > 有預編程功能的多功能開闢内置在機頭中。
- > 倒縫/間歇鎖定 預設速度的選擇

SPECIAL FEATURES AND APPLICATIONS

- > This machine post-bed high-speed seamer for shoe manufacturing,
- > It is especially available for sewing on medium heavy weight articles with arcshaped, such as superior leather shoes, hand bags, gloves, caps, you etc,
- It ensures you easy daily maintenance.
- No compressed air required, all electronic control.
- Easily adjustable thread trimmer for short thread ends.
- > Over load clutch for hook protection.
- > Easily and accurately adjustable needle guard.
- > A multi function switch with pre-programmed functions is integrated in the
- > Reverse sewing, intermediate backtacking, Selection of pre-set speed.

02 03 -



TTY-9618-1/9619-1 上下輪送三自動羅拉車



特點及用途

TTY - 9618-1/9619-1 BFT

B自動倒缝

F 自動抬壓脚 Automatic presser

■自動切綫

TTY-9618-1

單針高速羅拉車(針送&上下同步倒針輪送)

TTY-9619-1

雙針高速羅拉車(上下同步倒針輪送)

特點及用途

公司品牌

- >該機型系列高速縫紉機,用于制鞋業。
- >特别適用于縫制高檔皮革、包袋、手套、帽子等弧形中厚料物品。

産品型號 product code

- > 采用伺服直驅電機, 節能環保。
- >該機型完全采用電子控制,無需壓縮空氣。
- >采用過載離合器,用于放梭保護。
- > 可方便和精確調節的機針檔板。
- > 有預編程功能的多功能開闢內置在機頭中。
- > 倒縫/間歇鎖定 預設速度的選擇

SPECIAL FEATURES AND APPLICATIONS

- > This machine post-bed high-speed seamer for shoe manufacturing,
- > It is especially available for sewing on medium heavy weight articles with arcshaped, such as superior leather shoes, hand bags, gloves, caps, you etc,
- > It ensures you easy daily maintenance.
- > No compressed air required, all electronic control.
- > Easily adjustable thread trimmer for short thread ends.
- > Over load clutch for hook protection.
- > Easily and accurately adjustable needle guard.
- > A mulitifunction switch with pre-programmed functions is integrated in the
- > Reverse sewing,intermediate backtacking, Selection of pre-set speed.

TTY-9630-1

上下輪送細柱三自動羅拉車

slim post bed sewing machine with top and bottom feed



	•					
	0			10	٠	
			•		•	
X		•	•	0	۰	
	DPx6 (#9~#21)	DPx5 (#9-#21)	DPx5 (#9-#21)	DPx6 (#9~#21)	DPx5 (#9~#21)	DPx5 (#9~#21)
	標準釜	標準釜	標準釜	標準能	標準能	大釜
	41	41	41	41	41	41
	7/5	7/5	7/5	7/5	7/5	7/5
Up the state of th	15	15	15	15	15	15
	2500	2500	2500	2500	2500	2500
	9630-1B	9630-1T	9630-1FT	9630-1BT	9630-1BFT	9630-1L

特點及用途

TTY - 9630-1 **BFT**

B 自動倒缝 Automatic backfacking

F自動抬壓脚

■自動切綫

TTY-9630-1

單針高速羅拉車(針送&上下同步倒針輸送)

(needle feed& top and bottom roller feed when backtacking)

特點及用途

公司品牌

- >該機型系列高速缝紉機,用于制鞋業。
- >特别適用于缝制高檔皮革、包袋、手套、帽子等弧形中厚料物品。
- >采用伺服直驅電機, 節能環保。
- >該機型完全采用電子控制,無需壓縮空氣。
- >采用過載離合器,用于放梭保護。
- >可方便和精確調節的機針檔板。
- > 有預編程功能的多功能開闢内置在機頭中。
- > 切綫短, 綫頭僅僅2.5mm。
- > 倒縫/間歇鎖定 預設速度的選擇

SPECIAL FEATURES AND APPLICATIONS

- > This machine post-bed high-speed seamer for shoe manufacturing,
- > It is especially available for sewing on medium heavy weight articles with arcshaped, such as superior leather shoes, hand bags, gloves, caps, you etc,
- > It ensures you easy daily maintenance.
- > No compressed air required, all electronic control.
- > Easily adjustable thread trimmer for short thread ends.
- > Over load clutch for hook protection.
- > Easily and accurately adjustable needle guard.
- > A multifunction switch with pre-programmed functions is integrated in the
- > After cut thread, the thread only 2.5mm.
- > Reverse sewing intermediate backtacking, Selection of pre-set speed.

04

TTY-9910BFT/9920BFT

三自動羅拉車

omatic roller post bed lockstitch sewing machine



	۰			٠	٠	
			•		•	
X			•	٠	٠	
	DPx5 (#9~#21)	DPx5 (#9~#21)	DPx5 (#9~#21)	DPx5 (#9~W21)	DPx5 (#9~#21)	DPx5 (#9~#21
	標準釜	標準釜	標準釜	標準釜	標準釜 devided him	大釜
	41	41	41	41	41	41
	7/5	7/5	7/5	7/5	7/5	7/5
	15	15	15	15	15	15
	2500	2500	2500	2500	2500	2500
⊊î.	9910B 9920B	9910T 9920T	9910FT 9920FT	9910BT 9920BT	9910BFT 9920BFT	9910L 9920L

TTY-9910/9920

單/雙針高速立柱式羅拉車

ckstitch heavy duty sewing machine With wheel feed needle feed and driven roller presse

























特點及用途

TTY - 9910/9920 **BFT**

B自動倒缝

F 自動抬壓脚 Automatic presser

■自動切綫

TTY-9910BFT

TTY-9910

單針高速羅拉車(針送&上下輸送) servise searche consibed sewing machine(needle feed& top-bottom feed)

TTY-9920

雙針高速羅拉車(上下輸送)

特點及用途

公司品牌

- >該機型系列高速縫紉機,用于制鞋業。
- >特别適用于缝制高檔皮革、包袋、手套、帽子等弧形中厚料物品。

産品型號

- > 采用伺服直驅電機,節能環保。
- >該機型完全采用電子控制,無需壓縮空氣。
- > 采用過載離合器,用于放梭保護。
- > 可方便和精確調節的機針檔板。
- > 有預編程功能的多功能開闢内置在機頭中。
- > 倒縫/間歇鎖定 預設速度的選擇

SPECIAL FEATURES AND APPLICATIONS

- > This machine post-bed high-speed seamer for shoe manufacturing,
- > It is especially available for sewing on medium heavy weight articles with arcshaped, such as superior leather shoes, hand bags, gloves, caps, you etc,
- > It ensures you easy daily maintenance.
- > No compressed air required, all electronic control.
- > Easily adjustable thread trimmer for short thread ends.
- > Over load clutch for hook protection.
- > Easily and accurately adjustable needle guard.
- > A mulitifunction switch with pre-programmed functions is integrated in the
- > sewing head for:

Reverse sewing,intermediate backtacking, Selection of pre-set speed.







特點及用途

>機内軸承球形或針型、摩擦極小、可長久保持機油的潤滑性能、采 用了驅動式輪綫,且與輪形獨齒、針綜合送料,爬坡力極强,可順 暢的車縫各鐘厚薄物料, 附有操作簡單的安全離合器, 大大减少了 大釜的損壞, 用于鞋、包等皮革制品的高品質車縫。

SPECIAL FEATURES AND APPLICATIONS

> upper roller, lower wheel and needle feeding mechanism ensure smooth sewing at all time even join other material for overlap sewing, needle feeding ensures constant supply of thin and thick material on matter it moves straight or makes turns, also suitable for sewing spongy material, no crinkle or transform will be occurred, instead, the stitch is very smooth and neat. low friction between the parts because ball and needle bearings are used, suitable for stitching high quality leather materials such as shoes, bags. etc.

06 - 07 -



TTY-9910H/9920H

單/雙針高速立柱式羅拉車(適用于粗綫車縫)























- >缝目設定精確一致,大小可自由調整。
- >采用球形或針狀軸承,配合連杆式天平,摩擦小,免保養。
- > 采用全回轉垂直式軸之梭頭附梭過開闢器(牛角梭置)。
- > 釜座位于針的右方,方便于童鞋及名式鞋類的車縫。
- > 適用于鞋類、皮鞋制品等粗錢車縫及飾縫,可使用至#0綫(12股, 3x4) 之粗錢。

SPECIAL FEATURES AND APPLICATIONS

- > Easily adjustable stitch length variation.
- > Easy guiding of work because the post is arranged to the right of the neelde,
- leathers, shoes Etc.
- > Upper roller, lower wheel and needle feeding mechanism ensure smooth sewing at all time even join other material for overlap sewing.
- > With convenient safe clutch, which can prevent the hook from attrition.
- > Suitable for stitching thick thread (#0, 12pcs, 3*4) products , such as shoes,

單/雙針平板羅拉車



TTY-851/852





>立式旋梭,自動供油。

>滚珠及滚針軸承設計,易于修理。

>驅動式上下滚輪送料確保針距大小一致。

特點及用途

















SPECIAL FEATURES AND APPLICATIONS

- > Driven roller presser foot suitable for sewing arc and irregular products. >滚輪壓肢,特别適合縫制曲狀和不規則物品。 > Design with ball and needle bearing, easy maintenance
 - > Built-in bobbin winder.
 - > Standard vertical hook automatic lubrication.

TTY-810/820

單/雙針立柱式高頭車

































特點及用途

- > 采用全回轉垂直式軸之梭頭,聯接杆式的天平,車縫效果良好。
- > TY-810單針, 釜座位于針的右方, 方便于童鞋及各式鞋類的車縫。 將輪綫押脚的配件組, 更换爲平押脚的配件組, 即可適用于帽子 與假發之車縫。
- > 適用于運動鞋、男女鞋、馬靴、袋子、帖子、假發等車縫及飾縫。

SPECIAL FEATURES AND APPLICATIONS

- > Excellent sewing effects and first class quality thanks to vertical rotating hook and link take-up lever.
- > TY-810: single needle ;easy guiding of work when sewing on closed shoe uppers, e.g. children's, because the post is arranged to the right of the needle change the roller pressure foot accessories into the flat pressure foot accessories.
- > Suitable for sports shoes, ladies shoes, jackboots, bags, caps, wigs etc.

TTY-492A.B/498A.B/499A.B

細(低/中/高)羅拉車





















特點及用途

- > 特殊細中座設計,能車縫一般羅拉車較不容易操作的小産品及較難 車縫之角度。
- > 依據車縫之需求,指定釜座之方向(分左右向)及高度(一般、 中、高)。
- > 中座之高度分一般180mm、中高280mm、超高380mm。
- > 釜座之方向分左釜座與右釜座編號爲B、A。

- > Special slim middle-post design can sew smaller shoe products which can't be operated by general roller machine as well as some complicated materials
- > The direction(right or left) and height (normal, middle, high) of middle-post can be set up in accordance with sewing demand
- > Height of middle-post can be divided to normal 180mm, middle 280mm and high 380mm.
- > The direction of middle-post divide to left and right, which is numbered as B, A.



TTY-810H/820H 單/雙針針送高頭車



























特點及用途

> 采用針杆擺動與送布牙同步送料的方式,滑杆挑綫,立式旋梭 勾綫, 形成雙綫鎖式綫迹。上下軸采用同步齒形帶傳動, 旋鈕 式針距調節裝置及杠杆式倒順縫裝置。高度178毫米的柱式縫臺、 使操作空間寬敞,回轉靈活。特别適用于幾層不同質地材料的 缝制,可防止缝料層之間的滑移,綫迹均匀美觀。

SPECIAL FEATURES AND APPLICATIONS

> Which adopts top and bottom feed by needle bar and feed dog, thread take-up by sliding bar, thread catching by vertical rotating hook to produce lockstitch. It uses cog belt for arm shaft and hook shaft driving, dial typed stitchregulator and reverse feeding lever. The post-bed of 178mm offer flexible and free working space, fit for sewing several layers of different material with beautiful stitches, preventing any displacement between the

TTY-810H-BT/820H-BT

單/雙針針送高頭車







TTY - 810/820 HBT

公司代號 産品型號

特點及用途

■厚料専用

B自動倒縫

> 采用針杆擺動與送布牙同步送料的方式,滑杆挑綫,立式旋梭

勾线, 形成雙线鎖式綫迹。上下軸采用同步齒形帶傳動, 旋鈕

式針距調節裝置及杠杆式倒順縫裝置。高度178毫米的柱式縫臺,

使操作空間寬敞,回轉靈活。特别適用于幾層不同質地材料的

縫制,可防止縫料層之間的滑移,綫迹均匀美觀。

■自動切綫









TTY-810H-BT

SPECIAL FEATURES AND APPLICATIONS

> Which adopts top and bottom feed by needle bar and feed dog, thread take-up by sliding bar, thread catching by vertical rotating hook to produce lockstitch. It uses cog belt for arm shaft and hook shaft driving, dial typed stitchregulator and reverse feeding lever. The post-bed of 178mm offer flexible and free working space, fit for sewing several layers of different material with beautiful stitches, preventing any displacement between the

TTY-810BT/820BT

單/雙針直驅高頭車

Single/double needle post-bed needle bar feed sewing machine





TTY-810BT



B自動倒缝

公司代號

特點及用途





TTY-820BT

















- > 釜座位于針的右方,方便于鞋類及各種物料的車缝,將輪錢配件組更換爲平壓脚配 件組、即可適用于制帽及假發的車縫、本縫下送、車縫順暢自如、縫目均匀美觀、 可提高缝制質量。缝目大小調節容易簡單。缝目大小調節容易簡單。直驅式單針高 頭車(附帶自動切线&自動倒缝)配置直驅式伺服馬達,省電節能。
- > 采用新型的自動切錢機構,使切綫效果更加完美。可以有效的減少縫綫的消耗量, 且降低更换核子底线的次數。進而提高缝制效率。附自動倒缝装置;軽按控制倒缝 的押扣開闢,即可輕鬆倒缝。可以提升倒缝制品質和提升缝制效率。

SPECIAL FEATURES AND APPLICATIONS


- > Kuffine statts on the right state of the reledits, convenient in severing shoes and all kinds of materials, proply will round parts regulacement for flat presser both accessories group, can be applicable to severing that and viet, under this severing, severing smooth frestly beautiful statistic evenity, can improve severing quality. Suffici haze adjustment easy. Stitch size adjustment easy. Stitch size adjustment easy. Stored criving type angle needle gas to tuck care (with automatic hargent 8 automatic reviews settling) with direct drive searon motor, prover sawing the province serving settling) with direct drive searon motor, prover sawing the province serving settling with direct drive searon motor, prover sawing the province serving settling with direct drive searon motor, prover sawing the province serving settling with direct drive searon motor, prover sawing the serving serving serving serving serving serving serving settling serving s
- langant & automatic reverse stitching) with oriect oriec server as reverse server.

 Using new type of automatic tangent, make tangent effect more perfect. Can effectively reduce the consumption of suture, and reduce the replacement of shuttle bottom line number. Sewing efficiency can be improved. With automatic reverse sewing equipment: light according to the control of reverse sewing button switch, you can easily reverse stitching, can promote reverse sowing products

TTY-513A

單針綜合送料平縫機









TTY-513A















特點及用途

- > 自動定針數、針位、切綫、倒縫,自動抬壓脚等多種模式可選。
- > 適用于縫制中厚料,例如紡織品、皮革、聚乙烯、合成物等
- > 適用于縫制服裝、箱包、皮衣、皮件、玩具、手表、鞋套等

SPECIAL FEATURES AND APPLICATIONS

- > Number, automatic needle position, tangent and reverse stitching, automatic presser foot and so on the many kinds of model is optional.
- > Suitable for sewing thick material, such as textile, leather, polyethylene,
- > Applicable to sewing clothes, bags, leather, leather goods, toys, watches, shoe covers, etc

10



人字型縫紉機



















TTY-652

特點及用途

>本機具備可防止跳針跳機的機構,可用以進行各種各樣的犬牙縫, 亦可進行直綫車縫; 犬牙寬度12mm, 要字寬度可用膝或手控制; 備有自動卷器,操簡單作,常用于皮料字縫及布料绣花。

SPECIAL FEATURES AND APPLICATIONS

- > This machine is suitable for general materials, equipped with a needle bar fixing mechanism to prevent needle bar from wavering, which will allow perfect zigzag stitches as well as straight stitches. The zigzag width 12mm and can be adjusted either by knee lifter or manual operation. Prepared automatic bobbin system, convenient operation.
- > This machine is suitable for zigzag sewing and cloth embroidery.

TTY-1126/1136/1146

曲臂人字車

High-speed auto oiler bending arm zigzag sewing machine









TTY-	1126	DPx5	<	*	*
TTY-1136 TTY-1146		DPx5	Y	*	*
		DPx5	V	*	*
(60)	14	4	721	Li	FU
1,500		• 000	73	34	7
1,500 1,500	•	• 0 0	E-000	34 34	The same

TTY-1126

特點及用途

- > 1126 單壓脚/兩點式 1136 單壓却/三點式 1146 單壓脚/四點式 > 本機采用研發最親擺針機構, 擺幅穩定, 全自動供油系統, 可確保 零件不易磨損,增加本機使用壽命,降低維修費用。
- > 本機適用于潜水衣、韵律服、皮革箱包、鞋、運動設備、杯套、圓 简車縫。

SPECIAL FEATURES AND APPLICATIONS

- > 1126 Single needle/two dots; 1136 Single needle/three dots;1146 Single needle/ four dots.
- > This machine designed with the lastest zigzag movement structure, ensure a steady stitching function.
- > Suitable for stitching cylinder material, shoes, leather bags, diving suit, rhythm clothes. sport tools, cap rings etc. machine with three & four dots can ensure a more strength & excellent stitching.

TTY-1452/2452

高柱式人字車

Oiler upper feed lockstitch postbed zigzag sewing machine









TTY-1452 DPx5 < TTY-2452 DPx5 <

(())	И,	別	베	1
1,500	•	55	34	7
1,500		55	34	7

特點及用途

- >本機采用研發最親擺針機構、擺幅穩定,全自動供油系統,可確保 零件不易磨損,增加本機使用壽命,降低維修費用。
- >采用兩倍大釜與梭心,減少更換底錢時間,節省工時浪費,提升缝 制效率; 本機適用口徑55mm以上。
- >本機適用于潜水衣、韵律服、皮革箱包、鞋、運動設備、杯套、圓 简車縫。

SPECIAL FEATURES AND APPLICATIONS

- > This machine designed with the latest zigzag movement structure, ensure a steady stitching function. fully automatic lubrication system, which can promise a long machine life&less maintenance charge
- > More free work space & easy operation due to the high post design, this machine can sewing more than ⊄ 55mm materials.
- > Suitable for stitching cylinder material, shoes, leather bags, diving suit, rhythm clothes, sport tools, cap rings etc.

TTY-435

筒型人字車























特點及用途

- >適用于縫制厚料,皮包、皮箱、袋類、鞋尖運動鞋、帽子、帳篷、 帆布、高爾夫球手套、成衣、行浪衣、運動用品、沙發皮革制品、 管狀制品等。
- > 開啓式車頭訂蓄、增加其維修處理便利性。

SPECIAL FEATURES AND APPLICATIONS

- > This machine is designed for sewing extreme thick materials such as leather bags, cases, sport shoes, caps, tents, slipcover of golf ball bags, clothes, swimsuit, sofa, leather materials, tubular goods etc.
- > Equipment with newly design cover on the top of machine head, conver for machines



TTY-105 粗綫人字車







包、鞋等曲折縫和拼縫等。

特點及用途





TTY-105

SPECIAL FEATURES AND APPLICATIONS

> it is especially suitable in stitching safety belts, sofa, bags, shoes, cushions, etc.

TTY-1530/2530

> 本機適用于厚料粗綫、安全帶、保險帶、沙發、座墊、箱

單/雙壓脚人字平車(大梭、自動加油)







> 1530 單壓脚/兩點式 1533 單壓脚/三點式

2530 雙壓脚/兩點式 2533 雙壓脚/三點式

縫時所產生的噪音和减少零件的磨損。

>采用兩倍旋梭與梭心,減少更換底綫時間。雙押脚送料,强化

送步力量和確使針跟的穩定性。采用全自動加油設計,降低車

特點及用途



TTY-1530

SPECIAL FEATURES AND APPLICATIONS

- > 1530 Single presser/two dots 1533 Single presser /three dots 2530 Double presser /two dots 2533 Double presser /three dots
- > Adopt double rotating shuttle and shuttle bobbin, save the time for changing base thread, double presser foot feed, powerfully and ensure the stability of two distance. fully automatic lubricating system, long life and low noise.

TTY-2971



















特點及用途

- >押脚方向可360度旋轉,能適應各種物料車縫。
- > 简徑細小, 最寬不超過28mm。
- >特殊小角度.組長物料均可車縫。
- >適用于鞋類、玩具、手機套、皮具制品等各種物料。

SPECIAL FEATURES AND APPLICATIONS

- > Can be 360° circumgyrated around. Can stitch all kinds of materials.
- > Small cylinder diameter, with the width no more than 28mm.
- > Can stitch small and long materials with its special small angle.
- > Suitable for all kinds of materials as well as shoes, toy, mobile Shell, leather products etc.

TTY-335A/335B

高速單針綜合送料橫筒型縫紉機









TTY-335A

















特點及用途

>喇叭形押脚、狗齒、針綜合水平送料,幾層皮料一起縫制也不會縫 漏,密封同脂盒内的斜齒輪轉動無聲,延長了機器壽命,適用于皮 革、包、棉織物、帆布制品如汽車座椅、袋子、鞋、帳篷、室内装 飾品等厚料産品之包縫。(TY-335B適用平縫)

SPECIAL FEATURES AND APPLICATIONS

> Binder feeding together with pressuer foot, feed dog and needle unison feed can get a good result when several layers of material binding together. Bevel gears enclosed in grease-packed cases, promises the machine runs noiseless and works longer. The sewing is suitable for making heavy-material goods such as car seats, bags, tents,artifical leather,sponge cloth, canvas and so on (TY-335B the is suitable for making heavy-material goods such as car seats, bags, tents, artifical leather, sponge cloth, canvas and soon).



TTY-335-8BL

單針綜合送小筒型車

nine With Small Cylinderbed

























特點及用途

- > 爲小圓筒型之特殊設計,直徑爲39mm。特别針對小型至大型管狀物之 旋轉車縫設計,車縫順手無阻。
- > 綜合式送料押脚送, 針送, 狗齒送, 不拘材料表面之平滑或粗糙不平 整,縫紉時皆很穩定。當機層皮料加在一起縫紉時,内層也不會移動。
- > 綜合式送料: 針送, 狗齒送, 押脚送料, 可輕易的車縫多層之厚物料。 適用于小圆筒式物品,如鞋類、玩具、皮色類、袋類、小型物品等。

SPECIAL FEATURES AND APPLICATIONS

- > Designed with special small cylinder bed, with the diameter is39mm.easy and unhindered movement of small and big tubular goods.
- > The mechanism are walking foot, needle feed and feed dog, no matter the material's surface is smooth or rough, it can sew steadily, the inner layer won't move even several leathers sewed together.
- > Walking foot, feed dog & needle feed action complete with Unison feed canstitch eavy material easily. It's developed for sewing cube shape product such as shoes, toys, purse, bags and other small Things.



TTY-201 内裏修邊機









特點及用途

> 適用于各類鞋面之毛邊修削用鞋面之内裏修削。任何毛邊并速輕易 完成, 而不傷本體, 提高産品品質。生手易于學習, 效率約爲3-6 人工作能力。

SPECIAL FEATURES AND APPLICATIONS

> Trimming for inner lining and outsole, Any edge can be trimmed quickly and beautifully to upgrade the quality, Work efficiency is times of manual operation, even inexperienced workers can operate easily

TTY-345

全自動高速單針綜合送料横筒型縫紉機









TTY-345











TTY-202 大底/内裹修邊機 Outsole & lining trimming machine













特點及用途

- > 所有缝料上都能設置精確和連續的缝纫綫迹。因爲采用同步移動 式包邊裝置,包邊帶緊靠縫料,所以縫出的包邊非常整齊,即使 是帶弧的包邊。采用G型大旋梭、减少了更换鎖芯的次數。
- >標準配置護手板、皮帶護罩和挑綫杆防護罩。
- >配有切錢裝置、自動臺壓脚、自動針定位器與電子馬達連接。
- >可用于圆筒狀織物或預先粘了小附件的織物。用真皮、人造革或 紡織帶爲鞋子和皮革制品包邊,箱包和靠墊滚邊。

SPECIAL FEATURES AND APPLICATIONS

- > Precise and consistent stitch setting on all materials. Very meat bindings, even inside and outside curves thanks to the moving binder. Tape is held close to the binding edge. fewer bobbin changes when using G-version(large hook).
- > Equipped with finger-guard, belt-and take-up lever guards as standard.
- > Thread trimmer, Automatic presser foot lifting, Automatic needle positioner in connection with electronic motor for machines.
- > Working on tubular or pre-attached articles. Binding of shoes and leather ware with leather, imitation leather or textile tape, piping work on bags, suitcases and upholstery.

特點及用途

>適用于各類鞋面之毛邊修削用鞋面之内裹修削。任何毛邊并速輕易 完成, 而不傷本體, 提高産品品質。生手易于學習, 效率約爲3-6 人工作能力。

SPECIAL FEATURES AND APPLICATIONS

> Trimming for inner lining and outsole, Any edge can be trimmed quickly and beautifully to upgrade the quality, Work efficiency is times of manual operation, even inexperienced workers can operate easily



内裏、成型後修邊機

ining Trimming Machine (To Use After Molding











>適用于各類鞋面之毛邊修削用鞋面之內裹修削。任何毛邊并速輕易 完成,而不傷本體,提高產品品質。生手易于學習,效率約爲3-6 人工作能力。

SPECIAL FEATURES AND APPLICATIONS

> Trimming for inner lining and outsole, Any edge can be trimmed quickly and beautifully to upgrade the quality. Work efficiency is times of manual operation, even inexperienced workers can operate easily

TTY-206

雙色大底、内裏修邊機









TTY-206

特點及用途

- > 適用于雙色鞋底之毛邊修削及鞋面深内裹之修削;
- > 毛邊皆能迅速地安全消除,而不傷本體,細致工整,爲手工所無法 比擬。效率約爲3-7人工作能力。

SPECIAL FEATURES AND APPLICATIONS

- > Be suitable for trimming edge for inner lining and double color sale.

 The edge can be trimmed more quickly and beautiful than by hand-made
- > Rate of speed: About 3–7times of labor power.

TTY-209

雙色大底修邊機

imming machine for inner lining & double color sole









2,800

TTY-209

特點及用途

- > 適用于雙色鞋底之毛邊修削及鞋面深内裹之修削;
- > 毛邊皆能迅速地安全消除,而不傷本體,細致工整,爲手工所無法 比擬。效率約爲3-7人工作能力。

SPECIAL FEATURES AND APPLICATIONS

- > Be suitable for trimming edge for inner lining and double color sale.

 The edge can be trimmed more quickly and beautiful than by hand-made
- > Rate of speed: About 3-7times oflabor power

TTY-801A/B

削皮機(進口刀/國産刀)

Skiving machine(TTY-801A italy knife/TTY-801B taiwan knife











TTY-801B

特點及用途

- >平面削薄最大寬度50mm,可重復操作,以達到所需之寬度。
- >附自動除屑裝置&磨刀離合器,使用便利。
- >配用不同規格壓脚,可依據實際情况要求更换
- >適用于各種皮革、人造皮、橡膠等材質所制成的鞋、皮帶、皮 夾、手套等的邊緣削薄及平面削薄。

SPECIAL FEATURES AND APPLICATIONS

- Plane thinned maximum width 50mm, repeatable actions to achieve the desired width
- > With automatic knife grinding device except cuttings & clutch, use the convenient
- Completed with different specification of the presser foot, based on the actual situation requires replacement.
- > Applicable to all kinds of leather, artificial leather, rubber and other materials made shoes, belts, wallets, gloves and other edge cut thin and flat cut thin.

18



TTY-802A

萬能削皮機







特點及用途

綫等特殊削薄。



SPECIAL FEATURES AND APPLICATIONS

> Leather filings ate exhausted automatically. Enclosed with knife grinder clutch and several presser foot of different specifications that can be suitable for more

- > 適用于各種皮料的邊緣削薄及表面削薄,可削45度邊、邊削皮邊畫
 - > Suitable for edge skiving and whole surface skiving of any kind of leather as well as rubber for shoes, bags, belts, gloves, etc.

TTY-801Z 重力型削皮機(上下、輪滚動送料)

> 附自動除屑裝置和磨刀離合器; 關有機種不同規格的押脚, 可根據







> 適用于鞋頭港寶,中底等厚料的片削加工。



TTY-801Z

SPECIAL FEATURES AND APPLICATIONS 特點及用途

> Suitable for slitting and peeling of thick materials of leather shoes such as heel lining and toecap lining etc.

TTY-204

雙針摩卡車(適用于極厚料)























特點及用途

- >輪綫前後左右調整;針榴可在任意調整針位5-7.5mm針距,來車縫
- >大釜可調整前後移動,可延長針的壽命;大釜半回轉擺動;
- > 附有齊全的零配件;選用輪綫或平牙脚,來車縫物品;
- >選用一般的摩卡車縫,或選用將繩綫嵌入的摩卡車縫物品; 適用于鞋類、皮包類、皮革制品,等之物品。

SPECIAL FEATURES AND APPLICATIONS

- > Available to adjust the hand wheel by the directions of front, Back,left and right.
- > The position of the needle is adjustable about 5mm to 7 .5mm to sew the article.
- > Available to adjust large hook in the direction of front and back which can prolong the life of the needle. Large hook swings in a direction of semi-revolving.
- > Select a hand wheel or a hinged presser foot to sew the stuff. select a general Mocca Sewing Machine or a Mocca Sewing.
- > Machine With inserted link to sew the stuff, and it's useful for Shoes, purses, leather Products and soon

TTY-205A/B

單針壓脚上下送筒型車(摩卡車適用于極厚料可選配打皺器)









TTY-205A























特點及用途

- > 押脚提升可達20mm適用于縫制極厚之物料; 押脚擺動可任意調整針距; > 可供縫制的工作範圍320mm, 適用于縫制大的物品;
- > 采用半回轉式的大釜與大梭子,可以減少更換底綫的資料,而增加縫
- > 適用于手提袋的手把,棒球手套、安全帶、帳篷、椅墊、鞋類、箱包 類等極厚物料之縫制。

- > Presser foot can be lifted up to 20mm for sewing extremely thick materials. movement of the presser foot can be infinitely.
- > Free working space is 320mm suitable for large items.
- > Largehalf circugyration shuttle reduce number of thread changes and toraise Sewing efficier cy.
- > This machine is designed for sewing extreme heavy materials such as handles svitcdses or buiefcases basehall mittens, seat belts, chair cushions, shoes, etc.



自動加油中底縫合機



















特點及用途

- > 適用于運動鞋,加洲式中底之縫合,工作手套、中厚皮、潜水衣、 娃娃鞋, 本機采用自動加油裝置, 使本機壽命加長没有滲油的煩 惱;手臂高,有較多的操作空間,使用方便;本機采用手壓式區 分針距,方便操作者操作機器。
- > 適用于極厚皮革縫合,大型運鞋拉縫,大型加洲式中底縫合。

SPECIAL FEATURES AND APPLICATIONS

- > Insoling machine for california style athetic shoes, also suitable for sewing working gloves, furs of medium thickness diving suits, and children shoes. Automatic lubrication for longer service Llife, no oil leakage problems due to
- > Easy adjustment of stitch length by push button designed for easy operation.

- special design better handling due to extra large clearance under front cup arm.

TTY-600

自動加油中底縫合機



特點及用途

















TTY-600

SPECIAL FEATURES AND APPLICATIONS

- > 適用于運動鞋,加洲式中底之縫合,工作手套、中厚皮、潜水衣、 > Insolling machine for california style athetic shoes, also suitable for sewing working 娃娃鞋, 本機采用自動加油裝置, 使本機壽命加長没有滲油的煩 gloves, furs of medium thickness diving suits, and children shoes. Automatic lubrication for longer service Llife, no oil leakage problems due to 惱;手臂高,有較多的操作空間,使用方便;本機采用手壓式區 special design better handling due to extra large clearance under front cup arm. 分針距,方便操作者操作機器。 > Easy adjustment of stitch length by push button designed for easy operation.
- > 適用于極厚皮革縫合,大型運鞋拉縫,大型加洲式中底縫合。


TTY-0305

三針五綫縫紉機

sewing machine

































特點及用途

- > 全自動加油系統與過濾系統裝置(可更换),最高縫速可達6000針 每分鐘,并且具有防止漏油功能。
- > 采用自動冷却潤滑裝置來冷却潤滑針與縫綫, 可避免跳針或斷綫, 而增進縫制品質與效率。
- > 可加裝各種功能的輔助配件,以達到各種特殊縫制流程的要求。
- > 針迹可在31-33mm之間設置,適用于中、薄料。


SPECIAL FEATURES AND APPLICATIONS

- > Fully automatic lubricating and filtering(interchangeable) system to ensure the max sewing speed is up to 6000 S.P.M. It also has the function of anti-oil leakage.
- > Fully adopted cooling and lubricating device to cool and lubricate needles and threads sl that to avoid needle skipping and thread broke.
- > Auxiliary components of various functions are available to meet different sewing
- > The needle bar stroke can be changed between 31 mm-33mm. It suitable for attaching on a fabric from medium to light weight materials.

TTY-0406

四針六綫綳縫機



























特點及用途


- > 0406系列爲針纖缝制作業之必備機型,四針六錢奉獻于您獨有的高 彈性、平坦且高度强的拼縫效果,简型機座及本公司獨創的步履式 壓脚, 在拼缝高彈性面料及椴部過缝處更輕鬆, 根據面料及開途的 不同有各鐘規格的壓脚針位組零件對應單切式、雙切式, 還有配備
- > 連成一體的小型伺服馬達, 追求高縫制品質和簡單操作性的新鋭機 型。

- > The machine is used on knitting sewing, the four needle and six needle machine can performance a high tension and very smooth side seam, The culinderbed and working foot can bee easily go through the side seam and folding side. The different model are equipped with sing cutter or doule cutter can finish different
- > stitch and used on different material. The machine can equipe a small servo motor for special requirest.




TTY-0406H 四針六綫綳縫機











TTY-0406H











- > 0406系列爲針纖縫制作業之必備機型,四針六綫奉獻于您獨有的高 彈性、平坦且高度强的拼缝效果, 简型機座及本公司獨創的步履式 壓脚, 在拼缝高彈性面料及椴部過缝處更輕鬆, 根據面料及開途的 不同有各鐘規格的壓脚針位組零件對應單切式、雙切式, 還有配備
- > 連成一體的小型伺服馬達, 追求高縫制品質和簡單操作性的新鋭機

>本機適用于加州鞋、摩卡鞋等,各類鞋型所需之鞋鞋頭之縮縫。

爲了强化縮縫之效果, 迹可同時增用"補强帶"來縫紉于縮縫

SPECIAL FEATURES AND APPLICATIONS

- > The machine is used on knitting sewing, the four needle and six needle machine can performance a high tension and very smooth side seam, The culinderbed and working foot can bee easily go through the side seam and folding side. The different model are equipped with sing cutter or doule cutter can finish different
- > stitch and used on different material. The machine can equipe a small servo motor for special requirest.

TTY-3811B

自動加油鞋頭縮頭車







之部分,以强固所需縮縫效果。

特點及用途















SPECIAL FEATURES AND APPLICATIONS

> This machine is suitable for sewing shoe top of California shoes, moccasin shoes etc, with reinforcement tape to enhance the sewing efficiency.

TTY-373/474/575 超高速包縫機(拷克車)(三綫/四綫/五綫)







特點及用途











SPECIAL FEATURES AND APPLICATIONS


> Suitable for overedging and overlocking on a wide range of material from light to extra heavy, with auto lubrication system. Low sewing tension ensure beautiful seam quality.

TTY-38L


貝形飾邊包縫機(貝殼車)

> 適用于一般棉布,針織布,運動衫及特厚料等的包缝作業,采用自

動潤滑裝置縫紉張力低,即使在高速劫時順暢自如,綫迹漂亮。

















特點及用途

- >改良特殊結構設計,可以變化多種車縫花樣。
- >適用于地毯,布類等各鐘物料的車缝。

SPECIAL FEATURES AND APPLICATIONS

- > With special structure design, can sewing various patterns.
- > Suitable for over locking the cloth and carpet etc.



雙綫座式内綫機

Double threads lock stitch seated type shoe-border stitcher(large hook)























特點及用途

- >全系列車縫采用"綜合送"方式,搖臂可隨鞋形做角度調整,針距均匀、美 觀、鞋頭不變形,不會把內裏勾出鞋外。專利分離式轉動機構,通任何阻礙 先空轉5圈并且自動切斷電源:無段變速馬達,自動定針及提升押脚; 操作簡便、安全、無噪音。
- >梭子直徑尺寸爲26mm。

- > Our principle-accurate stitching, uniform distance between slitches, neat look.

SPECIAL FEATURES AND APPLICATIONS

- Lining won't be pulled oulside, avoiding deformation of shoe shape. It has adjustable sewing arm according to shoe shape, the palented separable type transmission pulley will run 5 idle turns and cut off power automatically when encountering any obstacle in operation. Adjust speed by using P. I. V. motor, automatic needle positioning and lifting of presser foot. Easy and safe operation with low noisy.
- > The diameter of hook is 26 mm.

TTY-168S

雙綫座式内綫機

type shoe-border stitcher(small hook)























特點及用途

- >全系列車縫采用"綜合送"方式,摇臂可随鞋形做角度調整,針距均匀、美 觀、鞋頭不變形,不會把內裹勾出鞋外。專利分離式轉動機構,遇任何阻礙 先空轉5圈并且自動切斷電源;無段變速馬達,自動定針及提升押脚; 操作簡便、安全、無噪音。
- > 梭子直徑尺寸爲20mm。

SPECIAL FEATURES AND APPLICATIONS

- > Our principle-accurate stitching, uniform distance between slitches, neat look, Lining won't be pulled oulside, avoiding deformation of shoe shape. It has adjustable sewing arm according to shoe shape, the palented separable type transmission pulley will run 5 idle turns and cut off power automatically when encountering any obstacle in operation. Adjust speed by using P. I. V. motor, automatic needle positioning and lifting of presser foot. Easy and safe operation with low noisy.
- > The diameter of hook is 20 mm.

TTY-169

雙綫座式内綫機

ed type shoe-border stitcher



























特點及用途

- > 全系列車缝采用"綜合送"方式,揺臂可隨鞋形做角度調整,針距均匀、美 觀、鞋頭不變形,不會把內裏勾出鞋外。專利分離式轉動機構,選任何阻礙 先空轉5圈并且自動切斷電源;無段變速馬達,自動定針及提升押脚; 操作簡便、安全、無噪音。
- > 梭子直徑尺寸爲26mm。
- >臂長360mm,可縫皮包,長筒馬靴。

SPECIAL FEATURES AND APPLICATIONS

- > Our principle-accurate stitching, uniform distance between slitches, neat look.Lining won't be pulled oulside, avoiding deformation of shoe shape. It has adjustable sewing arm according to shoe shape, the palented separable type transmission pulley will run 5 idle turns and cut off power automatically when encountering any obstacle in operation. Adjust speed by using P. I. V. motor, automatic needle positioning and lifting of presser foot. Easy and safe operation with low noisy.
- > The diameter of hook is 26 mm.
- > The length of swing arm is 360mm, Boots and bags stitching.

TTY-167

座式内綫機(360度車大底)

























特點及用途

- > 全系列車縫采用"綜合送"方式、摇臂可随鞋形做角度调整、針距均匀、美 觀、鞋頭不變形、不會把內裹勾出鞋外。專利分離式轉動機構,遇任何阻礙 先空轉5圈并且自動切斷電源;無段變速馬達,自動定針及提升押脚; 操作簡便、安全、無噪音。
- > 梭子直徑尺寸爲26mm。
- > 底座可旋轉360度。

- > Our principle-accurate stitching, uniform distance between slitches, neat look.Lining won't be pulled oulside, avoiding deformation of shoe shape. It has adjustable sewing arm according to shoe shape, the palented separable type transmission pulley will run 5 idle turns and cut off power automatically when encountering any obstacle in operation. Adjust speed by using P. I. V. motor, automatic needle positioning and lifting of presser foot. Easy and safe operation with low noisy.
- > The diameter of hook is 26 mm.
- > The bottom seat can be circumrotated to 360 degree.




雙綫座式内綫機

ed type shoe-horder stitcher























特點及用途

- > 全系列車縫采用"綜合送"方式、搖臂可隨鞋形做角度調整、針距 均匀、美觀、鞋頭不變形、不會把内裹勾出鞋外。專利分離式轉動 機構, 遇任何阻礙先空轉5圈并且自動切斷電源; 無段變速馬達, 自 動定針及提升押脚;操作簡便、安全、無噪音。
- > 梭子直徑尺寸爲26mm。
- > 防水鞋車縫,雙針綫迹可一次性完成。

SPECIAL FEATURES AND APPLICATIONS

- > Our principle-accurate stitching, uniform distance between slitches, neat look.Lining won't be pulled oulside, avoiding deformation of shoe shape. It has adjustable sewing arm according to shoe shape, the palented separable type transmission pulley will run 5 idle turns and cut off power automatically when encountering any obstacle in operation. Adjust speed by using P. I. V. motor, automatic needle positioning and lifting of presser foot. Easy and safe operation with low noisy.
- > The diameter of hook is 26 mm.
- > Double stitching for waterproof shoes can be finished at one time.

TTY-268A

雙綫座式内綫機

type shoe-border stitcher

























特點及用途

- > 全系列車縫采用"綜合送"方式, 摇臂可隨鞋形做角度調整, 針距 均匀、美觀、鞋頭不變形,不會把內裹勾出鞋外。專利分離式轉動 機構,遇任何阻礙先空轉5圈并且自動切斷電源;無段變速馬達,自 動定針及提升押脚;操作簡便、安全、無噪音。
- > 梭子直徑尺寸爲26mm。
- > 防水鞋車縫,雙針綫迹可一次性完成。

SPECIAL FEATURES AND APPLICATIONS


- > Our principle-accurate stitching, uniform distance between slitches, neat look.Lining won't be pulled oulside, avoiding deformation of shoe shape. It has adjustable sewing arm according to shoe shape, the palented separable type transmission pulley will run 5 idle turns and cut off power automatically when encountering any obstacle in operation. Adjust speed by using P. I. V. motor, automatic needle positioning and lifting of presser foot. Easy and safe operation with low noisy.
- > The diameter of hook is 26 mm.
- > Double stitching for waterproof shoes can be finished at one time.

TTY-183

縫馬克機























- > 采用最新款伺服馬達,可自動定針。氣壓分離式控制,在車縫上更 穩定。電氣系統采用日本SMC產品。
- >一機多用,摇臂可依鞋款變化。可縫制厚料棉鞋及各種手工鞋。機 器重要零件都使用進口材料, 耐磨損。

SPECIAL FEATURES AND APPLICATIONS

- > Using the latest servo motor can fix the needle automatically. Adopting pressure separation control,it is more stable when sewing. Japanese SMC product is adopted for the electrical system.
- > The length of the rocker arm can be changed based on shoes patterns, This machine can sew the thick cotton shoes and all kinds of handmade shoes. The important components of the machine use imported Materials, which are durable and wear-resisting.

TTY-185 縫外綫機 Sole stitching machi


























特點及用途

- >本機結構采用最先進的設計,無噪音、耐磨損、高效力、低故 障、操作簡便。
- >凸輪、梭床、勾綫器梭殼等全采用特殊鋼料精加工、熱處理後, 再以高精度研磨制成; 所以精度、耐磨性等已領先國際水平。

- > This machine adopts the latest design for noiseless and easy operation with high efficiency and low failure rate.
- > Cam, shuttle base, hook and bobbin case are processed, heattreated with special steel material and then ground precisely.



曲臂花樣機 Crank shaft tricks machine











特點及用途

- >直接成型花樣機。
- >9種花樣,超級省人工。

SPECIAL FEATURES AND APPLICATIONS

- > Forming-Directly Pattern Stitching Machine,
- > Nine Stitching And Great Laboursaving.

1 AGO-1 NEEDLE 2 AGHI-2 NEEDLES × X 2 3 2 1

TTY-181HS 單/雙針粗綫電子花樣機 sngledduble neadle electronic design sewing machine(thick materials)































單針綫迹

	The appropriate sections	The second second second	Company of the Compan
00	-444444A es	20 000000	75 ΔΛΛΛΛΛΛΛΛ
01 0000000	56 -NNNNN.	51 Z.ZVZ.ZVZ.ZVZ.	76 AAAAAA
02 1	27 711111111	52 NINIMININI	77 0.0.0.0.0.0.0
03 2	28 ORRAGORA.	53 mamamamamany	78 WAWAWAWAN
04 NAMAMANANAN	59 MY MY MY MY	54	79 KXXXXXXXXX
05 MMMM 50	30 VIVIVIVIVIVIX	55 NANANANA	80 VZZANANANANA
06 111111	31 .X.X.X.X.X.	56 111111111111111	81 20/20/20/20/20/20/20/20/20/20/20/20/20/2
O7 UUUUUUUU	32 TTTTTTTT	57 111111111111111111111111111111111111	82 JIE.JIE.JIE.J
ON VINIMINIAN NO	33 MMMMMMMM	58 (0)(0)(0)(0)	
NUNNNNNN 00	34 WWWWWWWW	59 ZZZZZZZZZ	84 CMANANANA
10 ЛЛЛЛ.	35 ^^^^	60	85 DVDVDVD
NANAN 11	ANANANAN 86	61 NWWWWWW	86 777777
15 111111111111111111111111111111111111	JUNGURURU VE	es <i>proportional</i>	87 70000000
13 4444444	38 AAAAAAAA.	63 "\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	88 70070070070070070
14 .3.3.3.3.3.3.3.	39 ^^^^^	64 VAVAAVAVAVAVAV	89 VAVAVAVAV
15 XXXXXXXX	40 &^&^&^&^	65 ->>>>>>	202 ZAZ ZAZ 00
18 ZAMAMAMA	41 KYNYNYKY.	222222 88	91 JE.JE.JE.JE.
17 RENEEDED.	42 YUMMM	67 JJJJJJ	92 M.M.M.M.M.M
18 M M M M M M M	43 55555555555	68 TALVALVAL	93 III.III.III.I
19 22222222	44 JEVENDENET	WYNYN 69	94 7K-7K-7K-7K-7
20 VAVAVAVAVAVA	45 YUTNUTUUTA 34	30	95 LATVIVIVI
21 20/20/20/20/20/20	46 /000000000000000	71 .XMM.MM.XMM.	96 AN AN AN AN A
22 1210101210101010101	47 SVSVSVSVSVSVSVSV	72 AVAVAVAVA	יונויוונויונוי 16
23 _X_X_X_X_X_	48 077777777	73 5000000000000000000000000000000000000	98 2072072072
24 33333333333	49 304/03/2003/03/04/0	74 VMVMVMV	99

雙針綫迹
Double needle stitche

	Double ne	edle stitches		
00	SP RESERVED	20 X0030010000000000000000000000000000000	75	300000000000000000000000000000000000000
01 100000000000000000000000000000000000	26 DXXXXXXX	51 XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX	7.6	M M M M M M M
02 1000000000000	27 JIXIIXIIXIIX	52 XD0D0D0D0D0D0D	77	THERMALITY
03 DOOOOOOO	28 31311111111111	53 350050000000000000000000000000000000	78	200000000000000000000000000000000000000
04 X00000000000000000	50 KIXIXIXIXIXIXIXI	54 D004000000000	79	RXXXXXXXX
OS DODDODODO	30 XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX	55 MEMPERENDEN	80	(0000000000000000000000000000000000000
XIXIXIXIXXX ao	31 [22:2:2:2:2:2:2:	56 XXXXXXXXX	81	30000000000000000
OF CHITHITHING	32 TEXXXXXXX	57 DEEXERSESSES	82	TILLIII.X
DXDXDXDXDXDX	33 300000000000000000	58 XXXXXXXXXXXXXXXXX	83	ппппппппппппппппппппппппппппппппппппппп
DODOCOOOC es	34 300000000000000000	59 XXXXXXXXXXXXXXXXX	84	CONTROLOGICALISTS
10 11111111	35 3000000000000000000	ep IX X X X X X X	85	CIXXIIXXIIXXII
IN M M M M M	36 XERREBEE	61 DOODOODOO	86	*****
5 IIIIIIIIIIIIII	37 30000000000000000	es announementente	87	300000000000000000000000000000000000000
S TITITITE:	38 2000000000000000000	63 DOXXXXXXXXXXXXXXXXX	88	200000000000000000000000000000000000000
A TITITITI	39 3000000000000000000	64 100000000000000000	89	200000000000000000000000000000000000000
15 XXXXXXXXX	40 IXCIXIDATION	65 D000000000000000	90	2000 2000 2000
16 300000000000000000	41 XXXXXXXX	66 XXXXXXXXX	91	TOTAL TOTAL
17 MENUNEMEN	42 800080008300800	67 XXXXXXXXX	92	XXXXXX
18 M M M M M M M	43 (000000000000000000	68 XXXXX	93	THURSDAY
19 100000000000000000	44 INNKKKKK	69 XIEXXIEXXIEX	94	XXX.XXX.XXX.XXX.X
20 800000000000000000000000000000000000	45/XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX	70 (080000000000000000000000000000000000	95	MCTACTACTACT
21 3000000000000000000000000000000000000	46 X000000000000000000	71 MERKERSE	96	XXXXXXXXX
22 300000000000000000000000000000000000	47 20000000000	72 10000000000000000	97	TOTAL
23 TX X X X X	48 KXEKKKKE	73 900000000000000000	98	TITITITI
24 *********	49 80000000000000000	74 以放水果以果以	99	

特點及用途

> 本機適用于皮鞋、休閑鞋和皮包的幫面缝合加工, 單雙針花樣自由 設定,綫迹花樣高達200種。本機采用電子調整馬達,速度可靈活 掌握,停針位置由電腦控制,壓脚自動提升,可大大提高生産效率。

SPECIAL FEATURES AND APPLICATIONS

> This machine is suit to connecting-stitch for canvas materials, leather shoes, sport shoes, bags, leather, PU, PVC etc, it can store 200 stitch patterns, operator can change the designs for customer's requireme, and this machine use single & double systems, if take of the single needle, it can stitch insole, adopt speedregulated electronic motor, speed can be adjusted freely, ensure a highly work efficiency.

30

31 —

TTY-1900HS

電子花樣機



























特點及用途

- >加固結規格容易調節,自動剪綫,自動升降押脚。油槽式集中供
- >油,半圆弧形可任意調節大小,適用于鞋舌接缝。30x40mm範圍
- >内可編如下圖形: △ ○ □ ₩


SPECIAL FEATURES AND APPLICATIONS


- > Its's easy to adjust the specification of eye-let. It also has automatic thread Cutting and lift presser foot.
- > Oil groove supply, Size of circinal arc can be adjusted freely. Suitable for shoe tongue seaming.
- > Freeworking space 30x40mm, It can design the signs as Follows:

TTY-311G/326G/342G/6040G

























特點及用途

>采用外壓板壓緊方式, 間斷性送料, 可缝制X(左右)方向100/ 150/200mm, Y(前後)100/200mm。花樣文件采用二進制文件 格式,即**.dsb,可在绣花軟件中编制和编輯花樣,將花樣放大、 縮小、移動、旋轉。該車容易大, 内存容量爲70萬針, 内存花樣 數爲20個。外部使用優盤存儲,針數不做限制,花樣婁爲999個。

SPECIAL FEATURES AND APPLICATIONS

> This machine adopts outer pressing panels with feed dog at intervals. It can sew 100/1150/200mm from left to right and 100/200mm from front to back. As the design document adopts **, dsb form, the design can be made and modified in the embroider software. Also the design can be magnified, dwindled, transferred and revolved as you wish It possesses large capability The EMS memory can reach 70,0000 needles and 20designs, with U disk, It can store needles without limft

TTY-787

智能型折邊機











法式滚



特點及用途

- > 折小内彎邊保持統一寬度及自動剪口的裝置。
- > 設定折内彎,外彎及直邊時不同速度,效率更高。
- > 可貼1-4mm補强帶適合不同鞋面結構。
- > 根據操作者要求可調整機器工作臺合理高度, 更舒適作業, 降低勞
- > 采用進口步進馬達調頻電機,配合電子眼功能,動作連貫靈敏、順 暢。

SPECIAL FEATURES AND APPLICATIONS

- > Automation device to keep folding width steady duling internal curves execution.
- > Pre-set external-internal a linear curve speed.
- > 1-4mm adhesive band application, for different camp structure.
- > Work table can be adjusted.
- > It adopts the imported motor and has photocell.

32 33 -



TTY-757A/B 自動上膠折邊機(電子馬達)

folder machine with the new system(TTY-757A Electronic motor / TTY-757B General motor)

















特點及用途

- >該機用于鞋類、皮包、手機套等皮制品的PVC、PU、天然皮、人造皮、布料等材質、使用熱熔膠自動
- > 該機采用單片機控制上膠折邊作業,內彎具有腳動控制切齒,外彎折邊時自動控制減慢折邊速度 及電機控制定位三大功能,使整個作業過程實現智能化。采用觸摸式控制面板熔膠温度、出膠流量、 出膠温度數字顯示。出膠量可任意調節。
- > 先進的翻折機構,調節前便、折邊細致平整、寬度均匀、折邊閩潛漂亮。折邊寬度可調整3mm至 8mm可將補弱帶一并折人
- >757A 具有轉內彎,自動切齒功能,757B人工控制切齒,出膠系統雙重保護,性能優异。 757A/B具有雙重功能,可折邊、可做法式滾邊。折邊效果、工作效率爲手式操作的5-8倍
- > 外置控制箱,降低故障率,维修操作方便。

SPECIAL FEATURES AND APPLICATIONS

- > The machine adopts to the material of PVC PU leather, natural leather, artificial leather and civil for

- The folding width can be adjusted 3mm–8mm and can fold with reinformation. I ne socing within can be adjusted armit—armit and can rold with remorping tape. 757A has the function of recurved incisor output system automaticly, and 757B has this system Manually, they are Adopts double protection and their performance is very excellent.

- The machine adopts to the material of PACP Useful, runtil elabert, runtil cell safter and obth of shoes clothing and feeling products, it can automatically plestines, and fold with the Create.
 The machine adopts the single of bot to control inde-central and folding. If this three functions of recurved incince submatin reducing foldings plessed Suring out benefit folding and electric machine control Peatitioning the whole process realizes intelligence.
 Adopt the factor for planes the numbered inflication of centrer temperature flow rate and temperature of centert output and the steples adjustment of centert output.
- > The advanced folding mechanism can be adjusted easily, It has neat folding even width and it is
- automatic positioning of electric machine stop double protection of ce-ment output system. The folding effect and work efficiency is 5–8 times of manual operation.

TTY-747A/B

自動上膠折邊機(電子馬達/普通馬達)

cementing edge folder machine/TTY-747A Electronic motor / TTY-747B Electronic motor)



















特點及用途

- > 該機用于鞋類、皮包、手機套等皮制品的PVC、PU、天然皮、人造 皮、布料等材質,使用熱熔膠自動上膠折邊作業。
- > 該機采用單片機控制上膠折邊作業, 內彎具有脚動控制切齒, 外彎 折邊時自動控制减慢折邊速度及電機控制定位三大功能, 使整個作 業過程實現智能化。
- > 采用觸摸式控制面板熔膠温度、出膠流量、出膠温度數字顯示, 出
- > 膠量可任意調節。折邊寬度可調整3mm至8mm可將補强帶一并折入。











SPECIAL FEATURES AND APPLICATIONS

- > The machine adopts to the malerial of PVC PU leather, naturalleather, artificial leather and cloth for shoe clothing and leather products, It can automatically gelatinize and fold with hol-cement.
- > The machine adopts the single chip to control not-cement and folding. It has three functions of recurved incisor automatic reducing folding speed suring out bend folding and electric machine control Positioning the whole process realizes intelligence.
- > Adopt the touch control panes the numberical indication of cement temperature flow rate and temperature of cement output and the stepless adjustment of cement output.
- > The folding width can be adjusted 3mm-8mm and can fold with reinforcing tape.

TTY-608D

自動上膠分邊壓平機



















特點及用途

- > 本機采用氣動雙輪壓平設計,特點是噪音小、分邊平順零故障,可 一次性完成上膠、分邊、壓平三道工序。
- > 該機采用單片機控制上膠分邊壓平作業, 膠量穩定, 上膠均匀。雙
- > 電機分開控制左右出膠量,使用範圍廣,調節方便。
- > 結構合理、性能可靠,操作簡單方便。
- > 上膠錘平的品質好,效率高,爲手工操作8-10倍工作量。
- > 使用電子定位電機, 出膠系統雙重保護

SPECIAL FEATURES AND APPLICATIONS

- > This machine is suitable for the reverse seaming punching of such materials as leather and cloth used in shoes and cases it can perform glue coating, side separating and punching in one process.
- > The machine adopts single chip Machine to control glue coating side separating and punching > The glue supply is stable and the coating film is even. Dual motor used to
- control left and right glue supply separately It has wide range of application and is easy to adjust. > Reasonable structure, reliable performance and simple operation.
- > High efficiency and quality glue coating and punching It's output is 8-10 times that of manual
- > Electronic positioning motor is employed to support the glue supply system

TTY-608A

自動上膠分邊錘平機

rating punching machine

















特點及用途

- > 適用于鞋頭、箱包所用皮革、面料等材料的反缝合錘平,可一次性 完成上膠、分邊、鍾平三道工序。
- > 該機采用單片機控制上膠分邊鍾平作業, 膠量穩定, 上膠均匀。雙
- > 電機分開控制左右出膠量,使用範圍廣,調節方便。
- > 結構合理、性能可靠,操作簡單方便。
- > 上膠錘平的品質好,效率高,爲手工操作8-10倍工作量。
- > 使用電子定位電機, 出膠系統雙重保護。

- > This machine is suitable for the reverse seaming punching of such materials as leather and cloth
- used in shoes and cases it can perform glue coating, side separating and punching in one process > The machine adopts single chip Machine to control glue coating side separating and punching
- > The glue supply is stable and the coating film is even. Dual motor used to control left and right glue supply separately It has wide range of application and is easy to adjust.
- > Reasonable structure, reliable performance and simple operation. > High efficiency and quality glue coating and punching It's output is 8-10 times that of manual
- > Electronic positioning motor is employed to support the glue supply system.



TTY-608C

自動上膠分邊錘平機(曲臂型)





















特點及用途

- > 適用于鞋頭、箱包所用皮革、面料等材料的反缝合錘平, 可一次性 完成上膠、分邊、鍾平三道工序。
- > 該機采用單片機控制上膠分邊錘平作業, 膠量穩定, 上膠均匀。雙
- > 電機分開控制左右出膠量,使用範圍廣,調節方便。
- > 結構合理、性能可靠,操作簡單方便。
- > 上膠錘平的品質好,效率高,爲手工操作8-10倍工作量。
- > 使用電子定位電機, 出膠系統雙重保護。

SPECIAL FEATURES AND APPLICATIONS

- > This machine is suitable for the reverse seaming punching of such materials as leather and cloth

- > High efficiency and quality glue coating and punching It's output is 8-10 times that of manual

Electronic positioning motor is employed to support the glue supply system.

TTY-302

熱熔膠塗布機









特點及用途

- > 本機送膠結構采用獨特設計膠路保持跟空氣絶對隔離以免産生氣化。
- > 采用兩段式過濾設備,減少噴嘴堵塞現象。
- > 膠桶經過鐵氟龍處理,能快速將固體熔膠融成爲液狀且熱容膠不易 碳化。
- > 塗布範圍容易操作。

- > The machine adopts single chip Machine to control glue coating side separating and punching
- > The glue supply is stable and the coating film is even. Dual motor used to
- > Reasonable structure, reliable performance and simple operation.

SPECIAL FEATURES AND APPLICATIONS

liquid, and the Hot melt adhesive is free of easy carbonization.

> Two-section filter lowers the jammed rate of nozzles.

> Suitable for the hot melt adhesive in any state and form.

olation between air and adhesive.

> Easy control on coating area.

> The unique design of adhesive feeder contributes to free of oxidation by keeping is

> The Teflon treated adhesive container can quickly melt solid hot melt adh-esive into

> Strong adhesive spraying force at fast speed, stable and equal adhesive applying.

used in shoes and cases it can perform glue coating, side separating and punching in one process.

- control left and right glue supply separately it has wide range of application and is easy to adjust. > 熱熔膠槽經鐵氣龍處理, 换膠簡單, 可依熱熔膠的特性調整温度, 可有

TTY-303

熱熔膠上糊膠









特點及用途

- > 本機適用于0.5mm以上平面貼合上膠, 諸如: 鞋頭、皮箱、皮件、文具、 紙板盒類、運動器材等。創新設計之上輪座能上下浮動及壓力調整設計 對高低不平,輪、硬前低後高材料均能上膠。
- 交防止熱熔膠碳化。本機附定温裝置,保護馬達故障,并裝設吸排氣機, 可將异味排除。
- > 本機工作動力馬達采用雙頻器控制,轉速可無段變速調整。

SPECIAL FEATURES AND APPLICATIONS

- > Suitable for laminating minimum 0.5mm surface, such as:shoe, leather product, stationery, paper board box, and sports equipment. Adjustable wheel seat and pressure contribute to equal adhesive > applying on any kinds of materials with any kinds of surfaces.
- > Teflon treated hot melt adhesive through features easy adhesive replacement, the temperature can be adjusted according to characteristics of the hot melt adhesive, carbonization of the hot melt.
- > adhesive can be effectively prevented.
- > The machine is equipped with thermal protector for the motor. The exhaust is also equipped for discharging odor. The motor serving as the drive unit for operation is with frequency conversation
- > speed control for stepless speed control.

TTY-312

拉鏈四面上膠機









特點及用途

- > 取代于傳統雙面刷膠及雙面膠避免不必要的離型紙。
- > 可節省成本及環保,可使工作物清潔度高。
- > 本機臺操作簡單, 故障率低, 維修容易。
- > 可任意調整工作物之厚薄,上膠的寬度和膠量。
- > 適用馬鞋拉鏈上膠, 内裹和鞋面無須擦膠, 手袋及制衣的拉鏈上 膠等。

SPECIAL FEATURES AND APPLICATIONS

- > Replacing double side adhesive brushing and double sided adhesive, free of the unnecessary release paper
- > Low cost and environment protection, higher cleanliness of the processed product.
- > Equal adhesive applying on product in any shape, or any product surface or adge.
- > Simple operation, low failure rate, easy maintenance, > Adjustable thickness of the produ, applying width and volumn of the adhesive.
- > Suitable for applying shoe zipper cementing, free of applying adhesive on to the lining and shoe upper, zipper coating of handbag and gament.



熱熔膠點膠機





特點及用途

- > 廣泛用于制鞋、包裝、木工業......不同行業。
- > 空壓采用獨特設計確保不進水、不碳化。
- > 適用于: 點膠、填充膠、修狀膠、抹膠用。

SPECIAL FEATURES AND APPLICATIONS

- > It is suitable for various of industries, such as shoes making, packaging, wood
- > The pneumatic system is based on unique design, to avoid water leak in and
- > The machine suitable for:dot gluing,gule filling,bar type gluing,rub nozzle.

- 制造業。

 - > 操作簡易,噴塗均匀,可調整噴幅面積及膠量大小。

水性噴膠機 **TTY-305**

ed adhesive spraying machine







特點及用途

- > 廣泛用于鞋面内裏、套頭、皮箱上、皮包、皮帶及皮類等各種不同
- > 適用于任何天然膠、水性膠。
- > 節省用膠、電費及人力,提高品質及質量,降低成本。

SPECIAL FEATURES AND APPLICATIONS

- > Suitable for making shoe lining, shoe toe puff, leather case, leather bag, leather belt and other leather products.
- > Suitable for all nature adhesive and water-based adhesives.
- > Simple operation, equal coating. adjustable coating area and adhesive volume.
- > Saving use volumn of adhesive, power and labor, Improving quality, lowering cost.

TTY-307

硬輪强力上膠機





TTY-313

白膠上糊機









TTY-313

特點及用途

> 本機適用于運動鞋底, 插中紙板上强力膠使用。

SPECIAL FEATURES AND APPLICATIONS

> The machine is applicable to the sports shoes sole, as used to carton strong gum.

特點及用途

> 本機適用于運動鞋底,插中紙板上强力膠使用。

SPECIAL FEATURES AND APPLICATIONS

> The machine is applicable to the sports shoes sale, as used to carton strong gum.



TTY-25H

氣動分邊壓條機







特點及用途

- > 本機用于制鞋、手袋、皮具、皮料反接處,對反接處進行分邊按摩。
- > 本機采用針車臺式設計, 便于操作人員習慣性操作和現場協調性, 本機 工作效率高、品質好,一臺分邊機相當于6-8人手工分邊效率,相當3-4
- >臺普通按摩機效率,并且本機分開壓平效果也是其他機型無法比擬的。
- > 本機采用可調式氣缸, 厚薄皮料按摩均可適用。
- > 本機操作簡單,初次操作人員經專業人員培訓一個工作日便可熟練操作。

SPECIAL FEATURES AND APPLICATIONS

- other models of machine.

 > This machine adopts adjustable cylinder and is suitable for the massage of thick or thin

- > This machine is applied in the reverse connection positions of shoes making, handbags
- In its intellinet is applied in the reverse of contection positions to see an analysis and catherias, it performs side separating massage on reverse connection positions.

 The machine employe stable type design, which is convenient for operation and at-spot collaboration, the machine has high efficiency and good quality.

 One machine is equal to 6–8 workers in side separating, and 3–4 units of common type massage machines and the separated pressing efficiency of the machine prevails over massage machines and the separated pressing efficiency of the machine prevails over
- materials.the operation is so easythat a fresh worker can master it through one day training by professional staff.

TTY-25HZ 曲臂氣動分邊壓條機







特點及用途

- > 本機用于制鞋、手袋、皮具、皮料反接處,對反接處進行分邊按摩。
- > 本機采用針車臺式設計,便于操作人員習慣性操作和現場協調性,本機 工作效率高、品質好,一臺分邊機相當于6-8人手工分邊效率,相當3-4
- >臺普通按摩機效率,并且本機分閒壓平效果也是其他機型無法比擬的。
- > 本機采用可調式氣缸,厚薄皮料按摩均可適用。
- > 本機操作簡單,初次操作人員經專業人員培訓—個工作日便可熟練操作。

SPECIAL FEATURES AND APPLICATIONS

TTY-25HZ

- > This machine is applied in the reverse connection positions of shoes making, handbags
- In similar in a spinior in the reverse connection positions or sinces making, frainbudgs and leathers, it performs side separating massage on reverse connection positions.
 The machine employs table type design, which is convenient for operation and atspot collaboration, the machine has high efficiency and good quality.
 One machine is equal to 6–8 workers' in side separating and 3–4 units of common type. massage machines and the separated pressing efficiency of the machine prevails over other models of machine.
- This machine adopts adjustable cylinder and is suitable for the massage of thick or thin materials the operation is so easythat a fresh worker can master it through one day training by professional staff.

TTY-25

後跟壓條機

ening & tape attaching machine









特點及用途

- > 上下壓輪送料,可增加布和皮料間的貼合性。
- > 適用于各種鞋後跟的貼合壓平。

SPECIAL FEATURES AND APPLICATIONS

- > Upper wheel teamed up with lower wheel feed the material which increases the cohesion between leather or clothes.
- > This machine is useful for appearance finishing of the heel vamp after sewing and reinforcing good appearance by pressing the glued heel vamp.


TTY-006

半自動打釘機









TTY-006

特點及用途

- > 適合任何不同形狀、大小規格、各式各樣爪釘使用。
- > 榀調節工作速度,固定力度,光亮度等。
- > 簡易的操作系統,適用于初學者使用。
- > 激光指示工作位置,操作者衹需將面料對準機器激光位置。
- > 附有紅外綫感應器、避免在生產過程中對生產員引起的危險。

- > For all different shape nails.
- > Suitable for all kinds of leather, fabric, plastic material.
- > With a vacuum up-dice, can hold the nail with hand-free.
- > Laser light points a work position so operator just needs tofollow the light attached with the machine.
- > Security Scanner protect figures too close to dice in order to avoid accident happened.



全自動打釘機







特點及用途

- > 適合3mm至9mm直徑圓形四爪釘使用。
- > 可調節工作速度,固定力度,光亮度等。
- > 兩種操作模式-自動和手動,自動功能時,如果置于壓力面板上, 則連續工作; 手動功能時, 需要依次擠壓面板操作。
- > 簡易的操作系統,適用于初學者使用。
- > 激光指示工作位置,操作者衹需將面料對準機器激光位置。


SPECIAL FEATURES AND APPLICATIONS

- > Used for fastening \$\phi 3mm \times \Phi 9mm round nail with four claws.
- > Work speed, fixed strength, lightness can be regulated.
- > Has two styles of operation. It can be running continuous when set the pressure plate with automatic operation, otherwise, by hand operation people have to set the plate in turn.
- > It's suitable for inexperience operator due to the simple systems.
- > With the laser direction system, worker operates only have to fix the laser position.

TTY-170A

全自動多角度切帶機









特點及用途

- > 采用電腦控制系統,裁切角度0-45度任意調整,自動完成所需角度。
- >裁切采用撥動控制,速度每分鐘可達300次,效率極高,節省人手。
- > 操作面采用目前最先進的人機觸摸屏操作,更加簡便,更加準確。

SPECIAL FEATURES AND APPLICATIONS

- > Adopt computer system, cutting angle can be adjusted between 0-45 degree freely and automatically.
- > Cutting speed is more than 300lmin due to the advanced pneumatic system, high efficiency ensure to save more manpower.
- > Plate adopt lastest feeling display, it's easy for worker to operate, and the cutting length is more exactly.

TTY-160A

電腦切帶機

s and straps cutting machine





TTY-180A









特點及用途

> 采用電腦控制系統操作簡便,大大提高工作效率,精確度 高,裁切采用雙連標傳動更加穩定、耐用,可選擇冷熱兩用方式, 更方便適合各種材料裁切,是裁切設備首選産品。

SPECIAL FEATURES AND APPLICATIONS

> High work efficiency & easy operation due to computer system. driver system adopt double-link ensure a steady working, with cold & hot function for your choice, suitable for cutting all kinds of materials.

特點及用途

- > 采用電腦控制系統,裁切角度0-45度任意調整,自動完成所需角度。
- > 裁切采用撥動控制,速度每分鐘可達300次,效率極高,節省人手。
- > 操作面采用目前最先進的人機觸摸屏操作,更加簡便,更加準確。

SPECIAL FEATURES AND APPLICATIONS

- > Adopt computer system, cutting angle can be adjusted between 0-45 degree freely and automatically.
- > Cutting speed is more than 300lmin due to the advanced pneumatic system, high efficiency ensure to save more manpower.
- > Plate adopt lastest feeling display, it's easy for worker to operate, and the cutting length is more exactly.



TTY-801HZ

帶刀片皮機(鏟皮機)







特點及用途

- > 本機性能優越, 用途廣泛, 適用于皮革、運動鞋、真皮大底、橡膠底、 皮帶、皮包、手套、皮衣及運動器材等行業的PU革、EVA及各種天然真 皮、再生皮、橡膠等的高精度片皮和分皮作業。
- > 具有自動定位裝置, 刀具無需調整。
- > 自動調整刀具與壓板之間間隙,使片皮精度高。磨刀粉塵及加工廢料,
- > 有各自兒的吸塵系統,符合環境要求。根據不同的材料,任意調節不兩

SPECIAL FEATURES AND APPLICATIONS

- > The machine is applicable to precise splitting process of PU 、EVA leather, renewed leather and rubber material in the production of leather shoes, sport shoes, genuine leather, Sales, rubber sales, belts. leather handbags, gloves, leather wear and sports Equipment etc.
- > It has automatic positioning device and cutting tools no adjustment.
- > The automatic adjustment of clearance between the cutting tool and the pressure plate improves the slicing precision, the blade grinding powder and processing waste have respective dust collecting systems and satisfy the environment protection requirement.
- > It can freely adjust different working plate pressure according to the different materials.

輪盤式多功能貼合機 TTY-309





特點及用途

- > 手動調節控制。
- > 翻蓋式結構,操作更人性化。
- > 該機爲電氣、機械、氣壓復合系統。
- > 可旋轉式桌面覆蓋有軟墊和硅膠片,發熱板的熱能通過表層的鐵 氟龍使膠水活化,使貼合效果理想。

SPECIAL FEATURES AND APPLICATIONS

- > Manual control.
- > Flip-style structure, the operation more humane.
- > As electrical, mechanical, pneumatic composite systems.
- > Swivel-leaves covered with cushions and silica gel slices, heating plate heat energy through the surface of Teflon, making the sticking glue activation results.

TTY-301

内孔修邊機









TTY-301

- > 輕踏肢踏開關不到位,下切橫向上運動,方便上針刀與所需行孔 修剪的裹皮孔邊緣對齊。
- > 調節螺母可滿足不同厚度的物料加工要求。
- > 踏下脚踏開闢,可除去針刀表面粉塵。
- > 上針刀通邊磨刀砂輪修磨。

特點及用途

> 旋轉螺母可磨削下刀模。



SPECIAL FEATURES AND APPLICATIONS

- > Incomplete stepping down the pedal switch to make lower needle knife move upwards, which facilitate the upper needle knife get together with the inner edge of leather needed to be pruned .
- > Regulate nut can meet different thickness of material to be processed .
- > Step pedal switch, can remove the dust on the surface of needle knives .
- > Fit with knife grindingstone for upper needle knife sharpening .
- > Sharpen the lower needle knife by rotating the nut.

TTY-310

立式錘平機

Flattening & hammering machine(standing operation)







45



特點及用途

> 本機具有捶打和電熱燙平功能,能對各種皮件折邊或接頭鞋口進 行捶打和燙平,使折邊平整美觀,捶打頻率高,每分鐘達2000多 次,效果高。

SPECIAL FEATURES AND APPLICATIONS

> The machine have messaging and ironing function, it could message and iron all kinds of either's hem of joint welt, make hem neat and nice, the messaging ferquency is high, it arrival 2000 times per minute, efficiency is high.



桌上式捶平機







TTY-311

特點及用途

> 本機具有捶打功能,能對各種皮件折邊或接頭鞋口進行捶打和燙 平, 使折邊平整美觀, 捶打頻率高, 每分鐘達2000多次, 效果高。

SPECIAL FEATURES AND APPLICATIONS

> The machine have messaging, it could message and iron all kinds of either's hem of joint welt, make hem neat and nice, the messaging ferquency is high, it arrival 2000 times per minute, efficiency is high.

TTY-805

削泡棉機







用削泡棉機加工&傳統打粗機加工比較對照表

比較項目 Items	耗電量 Power	環保 Environment	品 和 Quality	産能 Yield	機器置放 Size
泡棉機 加工 Pare sea cotton machine	本機含吸 應功率局 0.83KW The machine centaining cleaning power 0.83KW	機器加工 噪音小, 無粉塵沫 Low noise, dustiess	加工物件 遊緣切削 平順,規 格化 Edge cutting smooth and standardization	1500 ~ 1800 片/小時 1500~1800 Pieces/per hou	體積小 移動容易 節省空間 Small size, movable,saving setting space
傳統打 精機加工 Traditional machine	打粗機帶 暖趣,一 般功率 3KW以上 Roughing machine with a vecuum or more general power SW	噪音大 粉塵沫 滿車間 Lordnose dusty	外表粗糙 邊線奔 缺不全 Edge cutting roughly	150片/小小時 150 Pieces/per hour	體積大 不利于安 排流水线 要另行安 排場地 Lange seas urmovate large searry space
對照結果 Compare resul	8小時間可 節約電20度 20 dectroity compare with traditional machine	池棉機加工. 比較環保 More environmental	泡棉機加 工品 在 定成 成		泡棉機 加工侵越 Advanced than traditional one

特點及用途

- > 本機設計開發用途適用于各類鞋型各部位, 如鞋舌、翻口領、鞋 口後套、羽片等所用泡棉的内外邊多角度斜削及打薄。
- > 本機操作使用,符合環保觀念,切削材料清潔度提高,泡棉粉沫 少,并附帶自動吸塵功能。
- >本機可根據加工之泡棉厚薄,寬窄及切削角度時行調整,可任意 調整切削之角度,方便各種角度切削進行。

SPECIAL FEATURES AND APPLICATIONS

- > The advanced R&D makes sure it apply to the cutting and the beveling of the plane and the adge of the foam used for the parts of various kinds of the shoes.
- > It can make the cleanness of the work mater ials high, the dust reduced, and the appearance beauty and smooth, and meets the environment protecting concept; it also has an automatic dust-suction device.
- > This machine can be adjusted according to the thickness, width, and all kinds of degrees of cutting and beveling of the work materials .

ICON INDEX BERRY



縫速(針) Sewing Speed (S.P.M)



垂直2倍旋梭 Vertical large hook



滚輪、針及牙送布 Needle feed with driven roller foot



柱壓脚,輔助壓脚 上限間隔 The height of between mai and sub presser foot



縫目(毫米) Stitch length (mm)



水平標準旋梭 Horizontal standard hook



自動剪綫 Sweing Speed (S.P.M)



壓脚微調裝置 Dial adjustment system (upper feed presser foot)



針柱衡程(毫米) Needle stroke (mm)



水平2倍旋梭 Horizontal large hook



自動膝動裝置 Sweing Speed (S.P.M)



擺梭 Large shuttle hook



挑錢長度(毫米) Thread take up stroke (mm)



水平2.5倍旋梭 Horizontal 2.5 hook



擾綫裝置 Thread wiper



極薄料 Ultra-thin materials



車針 Needle



牙送布 Drop feed



倒縫系統 Back tracking system



Thin materials



針距量 Needle gauge



針送布 Needle feed



人字缝寬皮 Zizag stitch length



中厚缝料 Medium-heavy materials



膝動壓脚升距 (毫米) Height of presser foot lifter,actuated by knee (mm)

手動壓脚升距

(毫米) Height of presser foot

垂直標準旋梭

lifter actuated by hand (mm)



上下送布

針、牙、靴送布

Unison feed

針、靴送布



帶切刀





上下定針裝置 Needle up and down button



極厚料 Ultra heavy materials



滚軸及牙送布 Drop feed with



上下定針功能 Automatic needle positioning